
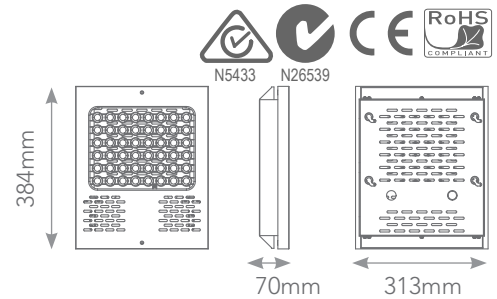


Andromeda Custom

RECESSED LUMINAIRE

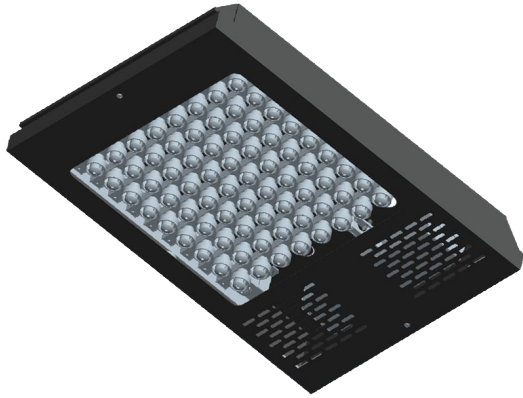

Schematic of AndromedaXPH-Recs-96W


› PRODUCT INFORMATION

Product Code	AndromedaXPH-Recs		
Dimensions	<i>Length</i>	<i>Width</i>	<i>Diameter</i>
	64W 384mm	313mm	70mm
	96W 492mm	131mm	70mm
	118W 601mm	313mm	70mm
Ingress Protection	IP66		
Weight	6.5kg/ 7.8kg/ 8.3kg		
Light Source	Nichia High Power LED		
Lens	Customisable*		
Housing	6063 Aluminium (Marine Grade)		
Housing Colour	Silver, White, Black, Custom		

› TECHNICAL SPECIFICATIONS

Input Voltage	85V-264VAC, 50/60Hz	
Lifespan	50,000 hours	
Power	64W, 96W, 118W	
Beam Angle	Customisable*	
Luminous Efficacy	95 lm/W	
Power Factor	0.95	
Operating Temperature	-25°C to +55°C	
CCT	5,000-5,500K	Cool White
	4,000-4,500K	Natural White
	2,700-3,000K	Warm White

WALL PACK LUMINAIRE

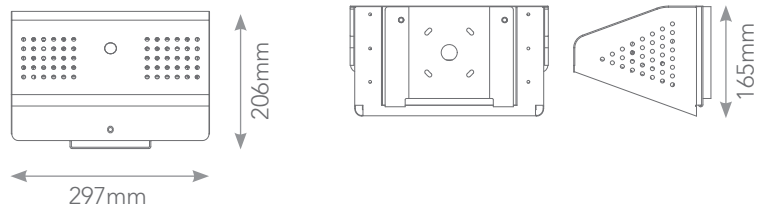

Schematic of AndromedaXPH-Wall 21W/32W/40W

› PRODUCT INFORMATION

Product Code	AndromedaXPH-Wall		
Dimensions	<i>Length</i>	<i>Width</i>	<i>Diameter</i>
	21W/32W/40W 297mm	206mm	165mm
	48W/64W 352mm	239mm	180mm
Ingress Protection	IP66		
Weight	3.8kg/ 4.5kg/ 5.1kg/ 5.7kg/ 6.5kg		
Light Source	Nichia High Power LED		
Lens	Customisable		
Housing	6063 Aluminium (Marine Grade)		
Housing Colour	Silver, White, Black, Custom		

› TECHNICAL SPECIFICATIONS

Input Voltage	85V-264VAC, 50/60Hz	
Lifespan	50,000 hours	
Power	21W, 32W, 40W, 48W, 64W	
Beam Angle	Customisable*	
Luminous Efficacy	95 lm/W	
Power Factor	0.9	
Operating Temperature	-25°C to +55°C	
CCT	5,000-5,500K	Cool White
	4,000-4,500K	Natural White
	2,700-3,000K	Warm White

*  For lens options see page 9 in Andromeda™ Standard section



IES Files available at www.empyreanlighting.com/downloads