



PRODUCT INFORMATION



MEASUREMENTS

LENGTH
145 / 180 / 240mm

DEPTH
12mm

LIGHT SOURCE

Epistar LED

LENS

Frosted PC / Prismatic

HOUSING

Aluminium alloy

MOUNTING

Recessed

TRIM

Silver

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE

110VAC 60Hz, 230VAC 50Hz

DIMMABLE

Optional

LIFESPAN

50,000 hours

POWER

8W, 15W, 26W

BEAM ANGLE

120°


CRI

>75

CCT

6,000-7,000K Cool White
3,800-4,500K Natural White
2,800-3,500K Warm White
Red, Green, Blue, RGB

SCHEMATIC OF CORONA-145C-8W

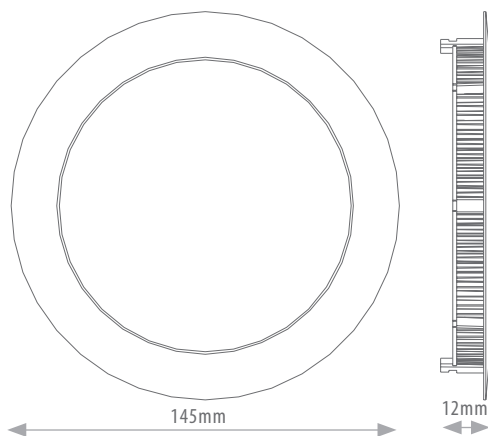

OUTPUT

	Cool White	Natural White	Warm White
8W	650 lm	600 lm	550 lm
15W	1,250 lm	1,150 lm	1,050 lm
26W	2,200 lm	2,000 lm	1,800 lm

PRODUCT CODE BUILDER

E.G. CORONA-240C-26WN-D-R

PRODUCT RANGE	DIAMETER (MM)	LENS	POWER	CCT	DIMMING	MOUNTING
Corona	- 145C (145)	P (Prismatic)	- 8W	C (Cool White)	- D (Yes)	- R (Recessed)
	- 180C (180)		- 15W	N (Natural White)	- TD (Tridonic-Dali)	- S (Suspended)
	- 240C (240)		- 26W	W (Warm White)	- DD (Dali)	
				X (RGB)	- ND (None)	
				R (Red)		
				G (Green)		
				B (Blue)		