



PRODUCT INFORMATION



MEASUREMENTS

300S*

170S¹

LIGHT SOURCE

LENS

HOUSING

MOUNTING

TRIM

LENGTH

295mm

168mm

WIDTH

295mm

168mm

DEPTH

12mm

12mm

LumenMax/Epistar LED

Frosted PC / Prismatic

Aluminium alloy

Recessed, Suspended, Wall Mount,

Hard Surface, Box Frame

T-bar mounted in suspended ceilings (default)

Silver, White, Black, Optional

* CORONA 295 X 295MM IS ALSO AVAILABLE IN A STEPPED FRAME 320MM X 320MM WITH CLIPS FOR CUT OUT SIZE 300 X 300MM

¹ CORONA 170S HAS A STEPPED FRAME IDEAL FOR CUTOUT OF 150 X 150MM

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE

110VAC 60Hz, 230VAV 50Hz

DIMMABLE

300S only

LIFESPAN

50,000 hours

POWER

12W, 20W

BEAM ANGLE

120°


CRI

>80 (Warm & Natural)

CCT

6,000-7,000K Cool White
3,800-4,500K Natural White
2,800-3,500K Warm White
Red, Green, Blue, RGB

SCHEMATIC OF CORONA-300S-W20W

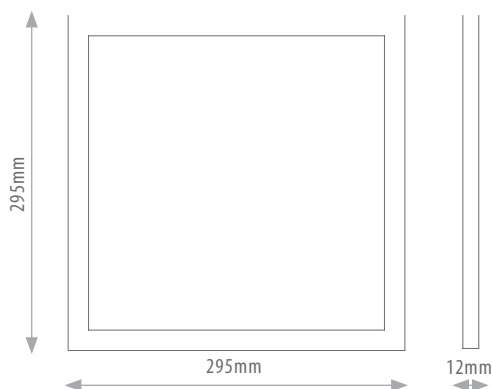

OUTPUT

	Cool White	Natural White	Warm White
12W	1,050 lm	950 lm	860 lm
20W	1,800 lm	1,650 lm	1,500 lm

PRODUCT CODE BUILDER

E.G. CORONA-300S-W20WN-D-S

PRODUCT RANGE	LENGTH (MM)	LENS	TRIM	POWER	CCT	DIMMING	MOUNTING
Corona	- 170S - 300S	P (Prismatic)	- S (Silver) - W (White) - B (Black) - O (Optional)	- 12W - 20W	C (Cool White) N (Natural White) W (Warm White) X (RGB) R (Red) G (Green) B (Blue)	- D (Yes) - TD (Tridonic-Dali) - DD (Dali) - ND (None)	- R (Recessed- Stepped Frame)* - S (Suspended) - W (Wall Mount) - H (Hard Surface) - B (Box Frame)