



PRODUCT INFORMATION



MEASUREMENTS

LIGHT SOURCE

LENS

HOUSING

MOUNTING

TRIM

LENGTH WIDTH DEPTH

595mm 595mm 8mm

LumenMax/Epistar

Frosted PC / Prismatic

Aluminium alloy

Recessed with Stepped Frame or Pack, Suspended, Wall Mount, Hard Surface, Box Frame.

T-bar mounted in suspended ceilings (default)

Silver, White, Black, Optional

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE

DIMMABLE

LIFESPAN

POWER

BEAM ANGLE

CRI

CCT

110VAC 60Hz, 230VAV 50Hz

Optional

50,000 hours

30W, 40W, 50W

120°

>80 (Warm & Natural)

6,000-7,000K Cool White



3,800-4,500K Natural White

2,800-3,500K Warm White

Red, Green, Blue, RGB

BEAM ANGLE = 120°

SCHEMATIC OF CORONA-600SS-S40W

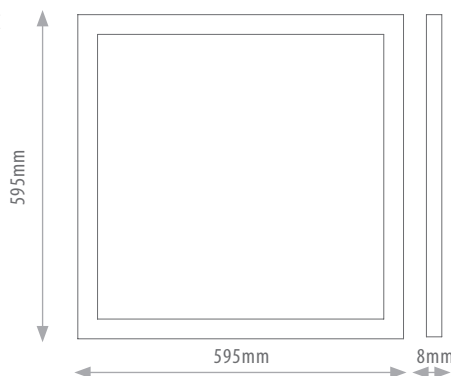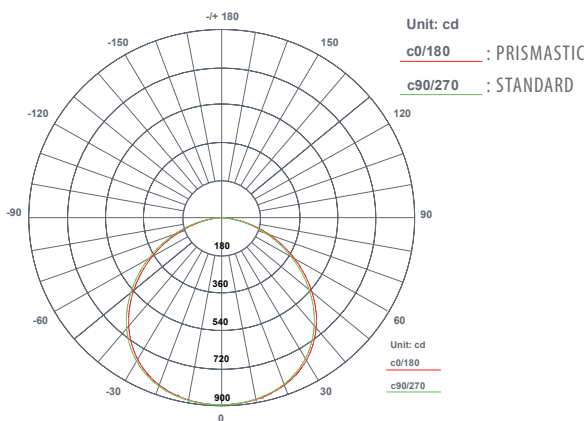

OUTPUT

	Cool White	Natural White	Warm White
30W	2,650 lm	2,500 lm	2,350 lm
40W	3,550 lm	3,350 lm	3,150 lm
50W	4,450 lm	4,150 lm	3,950 lm

PRODUCT CODE BUILDER

E.G. CORONA-600SS-S40WN-D

PRODUCT RANGE	LENGTH (MM)	LENS	TRIM	POWER	CCT	DIMMING	MOUNTING
Corona	- 600SS	P (Prismatic)	- S (Silver)	30W	C (Cool White)	- D (Yes)	- R (Recessed-Stepped Frame)*
			- W (White)	40W	N (Natural White)	- TD (Tridonic Dali)	- RP (Recessed Pack)
			- B (Black)	50W	W (Warm White)	- DD (Dali)	- S (Suspended)
			- O (Optional)		X (RGB)	- ND (None)	- W (Wall Mount)
					R (Red)		- H (Hard Surface)
					G (Green)		- B (Box Frame)
					B (Blue)		

*RECESSED WITH STEPPED FRAME DIMENSIONS INCREASE BY 23MM E.G. 595 > 618MM