


Corona™ Up / Down

PANEL LIGHTS

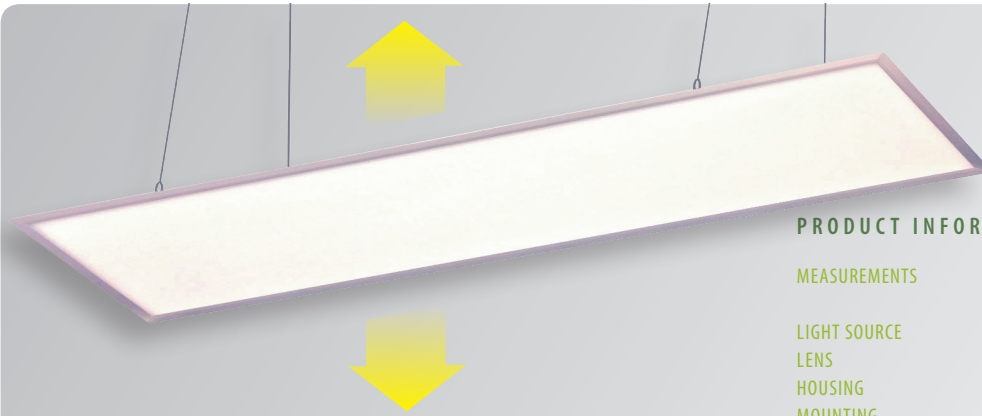

UP/DOWN PANEL

LED panel with clear backing which emits
~30% of total lumens upwards.

PRODUCT INFORMATION

MEASUREMENTS

LENGTH 1,195mm WIDTH 295mm DEPTH 12mm

LIGHT SOURCE

Epistar

LENS

Frosted PC / Prismatic (Down Panel Only)

HOUSING

Aluminium alloy

MOUNTING

Suspended

TRIM

Silver, White, Black, Optional

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE

110VAC 60Hz, 230VAC 50Hz

DIMMABLE

Optional

LIFESPAN

50,000 hours

POWER

26W, 40W

BEAM ANGLE

120°

CRI

80

CCT

6,000-7,000K Cool White
3,800-4,500K Natural White
2,800-3,500K Warm White

SCHEMATIC OF CORONA-U1200R-W40W



OUTPUT

	Cool White	Natural White	Warm White
26W	U: 715 lm D: 1,560 lm	U: 650 lm D: 1,495 lm	U: 585 lm D: 1,365 lm
40W	U: 1,100 lm D: 2,400 lm	U: 1,000 lm D: 2,300 lm	U: 900 lm D: 2,100 lm

PRODUCT CODE BUILDER

E.G. CORONA-U1200R-W40WN-DS

PRODUCT RANGE	TYPE	LENGTH (MM)	LENS	TRIM	POWER	CCT	DIMMING	MOUNTING
Corona	- U (Up/Down)	1200R (1200)	P (Prismatic)	- S (Silver) - W (White) - B (Black) - O (Optional)	26W 40W	C (Cool White) N (Natural White) W (Warm White)	- D (Yes) - TD (Tridonic Dali) - DD (Dali) - ND (None)	S (Suspended)