

CoronaTM Rectangular

MEDICAL ULTRA SLIM PANEL



BEAM ANGLE = 120°

PRODUCT INFORMATION



MEASUREMENTS

LENGTH 1,195mm
WIDTH 295mm
DEPTH 8mm

LENS

Frosted PC

HOUSING

Aluminium alloy

MOUNTING

T-bar mounted in suspended ceilings (default)
Recessed with Pack, Suspended,
Wall Mount, Hard Surface, Box Frame.
Silver, White, Black, Optional

TRIM

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE

110VAC 60Hz, 240VAC 50Hz

DIMMABLE

Optional

LIFESPAN

50,000 hours

POWER

20W, 40W, 70W

BEAM ANGLE

120°

CRI

95


CCT

~3,970K Natural White

COI*

1.0

*CYANOSIS OBSERVATION INDEX (NATA LABORATORY CERTIFIED TO AS/NZS 1680.2.5:1997)

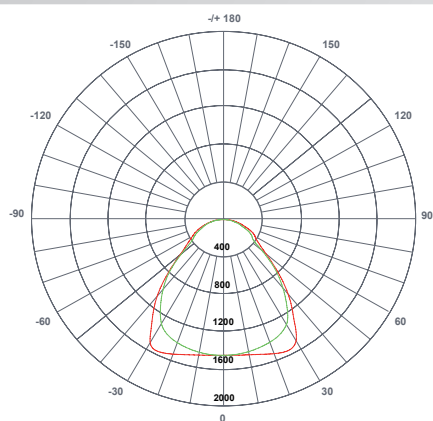

Unit: cd
c0/180 : PRISMATIC
c90/270 : STANDARD

PRODUCT CODE BUILDER

E.G. CORONA-1200RS-CYW40WN-D

SCHEMATIC OF CORONA-1200RS-CYW40W



PRODUCT RANGE	LENGTH (MM)	WIDTH (MM)	CYANOSIS	TRIM	POWER	CCT	DIMMING	MOUNTING
Corona	- 1200	RS(300)	- CY	S (Silver) W (White) B (Black) O (Optional)	20W 40W 70W	N (Natural White)	- D (Yes) - TD (Tridonic Dali) - DD (Dali) - ND (None)	- H (Hard Surface) - RP (Recessed Pack) - S (Suspended) - B (Box Frame)

*RECESSED WITH STEPPED FRAME DIMENSIONS INCREASE BY 23MM E.G. 595 > 618MM