



PRODUCT INFORMATION



MEASUREMENTS

LENGTH 595mm
WIDTH 595mm
DEPTH 8mm

LENS

Frosted PC

HOUSING

Aluminium alloy

MOUNTING

T-bar mounted in suspended ceilings (default)
Recessed with Pack, Suspended,
Wall Mount, Hard Surface, Box Frame.
Silver, White, Black, Optional

TRIM

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE

110VAC 60Hz, 240VAV 50Hz

DIMMABLE

Optional

LIFESPAN

50,000 hours

POWER

30W, 40W, 50W

BEAM ANGLE

120°

CRI

95

CCT

~3,970K Natural White



COI*

1.0

*CYANOSIS OBSERVATION INDEX (NATA LABORATORY CERTIFIED TO AS/NZS 1680.2.5:1997)

BEAM ANGLE = 120°

SCHEMATIC OF CORONA-600SS-CYW40W

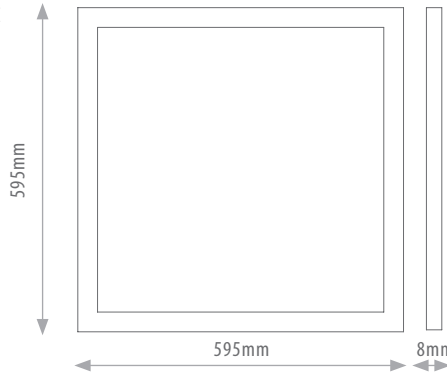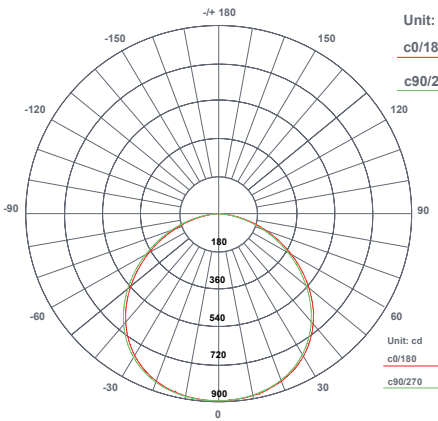

OUTPUT

Natural White
30W -
40W 2,543 lm
50W -

PRODUCT CODE BUILDER

E.G. CORONA-600SS-CYS40WN-D

PRODUCT RANGE	LENGTH (MM)	CYANOSIS	TRIM	POWER	CCT	DIMMING	MOUNTING
Corona	- 600SS	- CY	S (Silver) W (White) B (Black) O (Optional)	30W 40W 50W	N (Natural White)	- D (Yes) - TD (Tridonic Dali) - DD (Dali) - ND (None)	- RP (Recessed Pack) - H (Hard Surface) - S (Suspended) - W (Wall Mount) - B (Box Framd)