


Starstream XP Rigid

RIGID LED STRIP LIGHTING

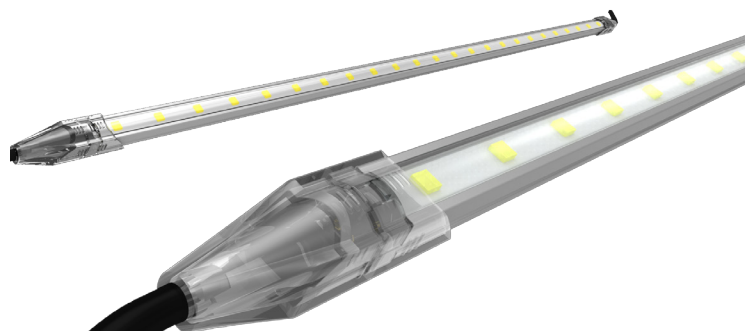


› PRODUCT INFORMATION

Measurements	Length	Width	Depth
	0.6/1/1.2m	20.5mm	17.5mm
Lens	Clear high strength PC, Other Options		
Housing	Aluminium Extrusion + Clear PC Cover		
Connection	Direct Link / Flexible Link		

› TECHNICAL SPECIFICATIONS

Input Voltage	12V, 50/60Hz
Dimmable	Yes
Lifespan	50,000 hours
Power	7W, 8W, 11W, 13W, 15W,
Beam Angle	120°
CCT	~5,800K (Cool White) ~4,000K (Natural White) ~3,000K (Warm White) RGB, Red, Green, Blue, Yellow

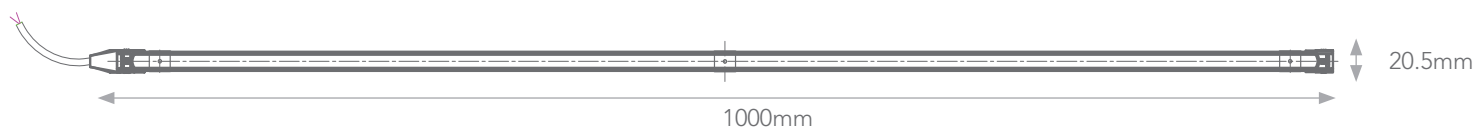

Schematic of StarstreamRigid XPH13W/XPB15W

› PRODUCT CODE BUILDER

e.g. StarstreamRigidXPH-7W-0.6MC

Product Range	Power	Length (meters)	CCT
StarstreamRigidXPH	-7W	-0.6M	C (Cool White)
	-11W	-1.0M	N (Natural White)
	-13W	-1.2M	W (Warm White)
StarstreamRigidXPB	-8W	-0.6M	X (RGB)
	-13W	-1.0M	R (Red)
	-15W	-1.2M	G (Green)
			B (Blue)

XPH (80lm/W)	Power	Output	XPB (82lm/W)	Power	Output
0.6mL	7W	560 lm	0.6mL	8W	656 lm
1.0mL	11W	880 lm	1.0mL	13W	1,066 lm
1.2mL	13W	1,040 lm	1.2mL	15W	1,230 lm

