


Vega™ 4", 5" & 6"

DOWNLIGHT WITH ADJUSTABLE GIMBLE



PRODUCT INFORMATION

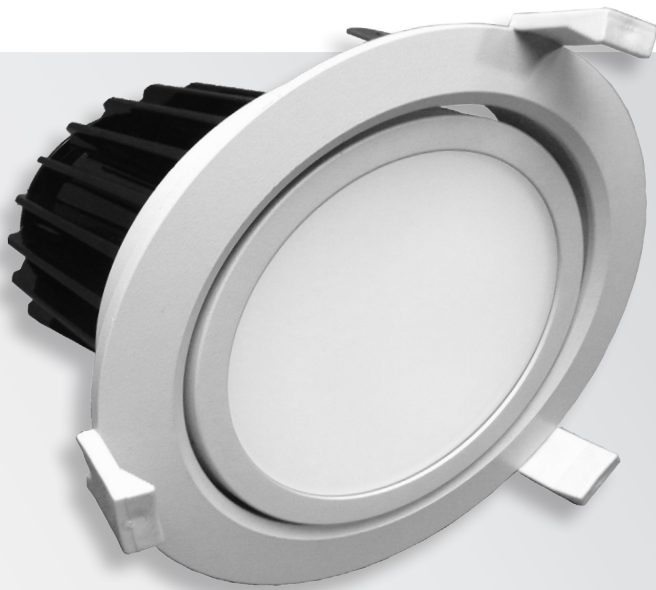

DIMENSIONS

	DIAMETER	DEPTH	CUT OUT RANGE
4"	105MM	102MM	88-98MM
5"	176MM	125MM	109-127MM
6"	187MM	147MM	144-167MM

LIGHT SOURCE

Epistar LED

LENS

Frosted Optical Grade PC

HOUSING

Aluminium

TRIM

Silver, White, Black, Optional

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE

85-265VAC, 50/60HZ

DIMMABLE OPTIONAL

Optional (with Tridonic™ Dali Driver)

LIFESPAN

35,000 hours

POWER

10W, 12W, 13W, 15W, 20W, 26W, 32W


BEAM ANGLE

70°

CCT

5,700-6,500K Cool White	85
4,700-5,300K Natural White 2	85
3,700-4,200K Natural White	>92
2,900-3,200K Warm White	>92

SCHEMATIC OF VEGA ADJUSTABLE 4"

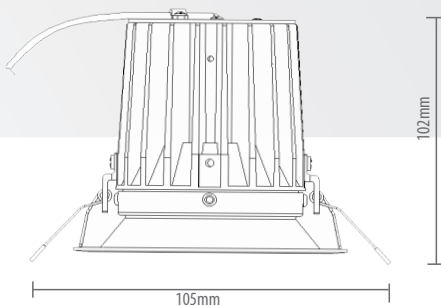

OUTPUT

OUTPUT		4"			5" & 6"			
		10W	12W	13W	15W	20W	26W	32W
COOL	Efficacy	85 lm/W	85 lm/W	86 lm/W	86 lm/W	86 lm/W	85 lm/W	78 lm/W
WHITE	Luminous Flux	850 lm	1,020 lm	1,120 lm	1,290 lm	1,710 lm	2,210 lm	2,496 lm
NATURAL	Efficacy	80 lm/W	79 lm/W	76 lm/W	76 lm/W	76 lm/W	68 lm/W	69 lm/W
WHITE 2	Luminous Flux	800 lm	950 lm	990 lm	1,140 lm	1,520 lm	1,768 lm	2,208 lm
NATURAL	Efficacy	75 lm/W	75 lm/W	73 lm/W	73 lm/W	73 lm/W	66 lm/W	60 lm/W
WHITE	Luminous Flux	750 lm	900 lm	950 lm	1,095 lm	1,460 lm	1,720 lm	1,920 lm
WARM	Efficacy	70 lm/W	70 lm/W	70 lm/W	70 lm/W	70 lm/W	65 lm/W	56 lm/W
WHITE	Luminous Flux	700 lm	840 lm	910 lm	1,050 lm	1,400 lm	1,690 lm	1,790 lm

PRODUCT CODE BUILDER

E.G. VEGA-6AW715W-ND

PRODUCT CODE	SIZE (INCH)	ADJUSTABLE	TRIM (MM)	BEAM ANGLE	POWER (W)	CCT	DIMMING
VEGA	-4	A (Adjustable)	S (Silver)	7 (70°)	10/12	C (Cool White)	-ND (Non-Dimmable)
	-5		W (White)		13	N2 (Natural White 2)	-D (Dimmable)
	-6		B (Black)		15	N (Natural White)	-TD (Tridonic Dali Dimmable)
			O (Optional)		20	W (Warm White)	
					26		
					32		