

Andromeda™ C Aqua

HIGH POWER 10,000K CCT LED



PRODUCT INFORMATION

PRODUCT CODE DIMENSIONS

	Andromeda-C-Aqua			
	Length	Width	Depth	Weight
160W	417mm	360mm	130mm	9 kg
320W	787mm	360mm	129.5mm	13.5 kg

INGRESS PROTECTION LIGHT SOURCE HOUSING

IP66
Nichia High Power LED
6063 Aluminium (Marine Grade)
Ceramic Diode Seat with Polycarbonate Rails
ST12

BRACKET MATERIAL

BRACKET TYPE

FRAME COLOUR

MECHANICAL IMPACT RESISTANCE

IP RATING

OPERATING TEMPERATURE

Wall Mount, Surface Mount, Suspended with Rods
Silver
IK08 (Bracket & Frame Only)
IP66
-40°C to +55°C

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE

LIFESPAN

POWER

DIMMABLE

BEAM ANGLE

LUMINOUS EFFICACY


POWER FACTOR

CCT


90-305VAC, 50/60Hz
50,000 hours to L70
160W & 320W
5-100% - 0-10V, DALI
* Variable based on Lens
110lm/W
>0.97
10,000K

* FOR LENS OPTIONS SEE LENS PAGE IN ANDROMEDA™ CERAMIC SECTION

SCHEMATIC OF ANDROMEDA-C-AQUA 160W

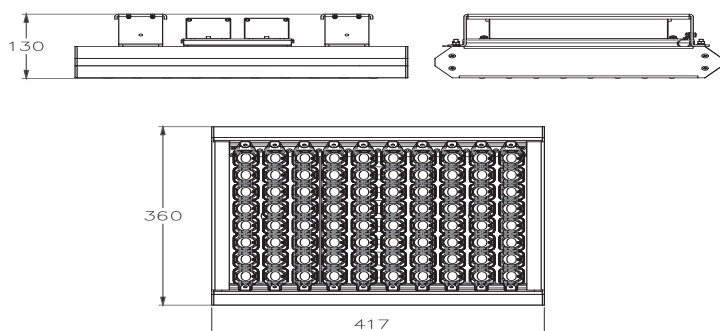

SCHEMATIC OF ANDROMEDA-C-AQUA 320W

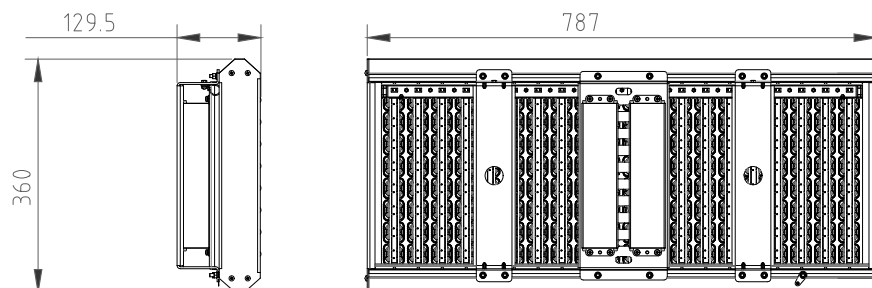

OUTPUT

WATTS	LUMENS
160W	17,600 lm
320W	35,200 lm

APPLICATIONS

