

NebulaTM Multi & Linear

FIXED CCT VARIABLE CONTROL LED



PRODUCT INFORMATION

DIMENSIONS

		Length	Width	Depth	Weight
Multi	20W	120mm	107mm	180mm	2.5kg
	40W	268mm	203mm	161mm	3.8kg
	60W	293mm	203mm	161mm	5.0kg
	80W	418mm	203mm	161mm	10.2kg
	100W	518mm	203mm	161mm	12.0kg
Linear	18W	600mm	70mm	121mm	3.2kg
	24W	1000mm	70mm	121mm	4.5kg
	36W	1200mm	70mm	121mm	5.9kg

INGRESS PROTECTION

IP66

LIGHT SOURCE

Nichia High Power LED

HOUSING

Aluminium alloy and adjustable mounting brackets

BRACKET MATERIAL

ST12

BRACKET TYPE

Wall Mount, Surface Mount

FRAME COLOUR

Silver, Black

MECHANICAL IMPACT RESISTANCE

IK08 (Bracket & Frame Only)

IP RATING

IP66

OPERATING TEMPERATURE

-40°C to +55°C

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE

90-305VAC, 50/60Hz

LIFESPAN

50,000 hours to L70

POWER

Multi - 20W, 40W, 60W, 80W, 100W
Linear - 18W, 24W, 36W

POWER FACTOR

>0.97

DIMMABLE

5-100% - DALI & DMX 512 for RGB

BEAM ANGLE

Multi - 10°, 40° (20W only), 40° Elongated
Linear - 10°, 15°, 25°, 30°, 50°

CCT

Multi	5,000-5,500K Cool White*
	4,000-4,500K Natural White
	2,700-3,000K Warm White
	RGB or Blue
Linear	5,000-5,500K Cool White
	4,000-4,500K Natural White
	RGB or Blue



Nebula Multi 40W




Nebula Multi 20W




Nebula Linear 18W


SCHEMATIC OF NEBULA MULTI 20W



SCHEMATIC OF NEBULA MULTI 80W

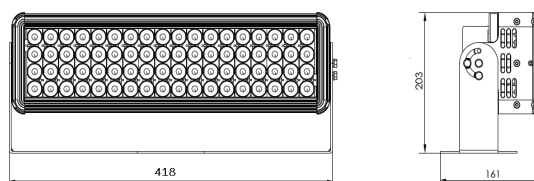

SCHEMATIC OF NEBULA LINEAR 24W

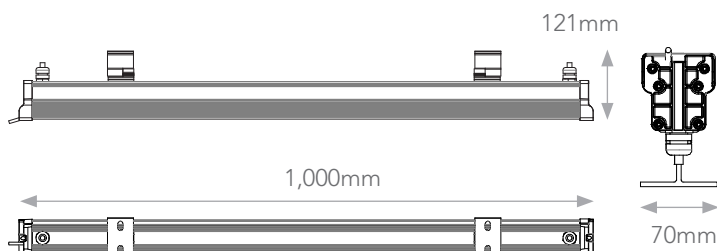

APPLICATIONS

