



PRODUCT INFORMATION



MEASUREMENTS

DIAMETER: 380 / 580 / 980mm
DEPTH: 13.5 / 15mm

LIGHT SOURCE

Epistar LED

LENS

Frosted PC

HOUSING

Aluminium alloy

MOUNTING

Wall/Ceiling Mount or Suspension

TRIM

White

OPERATING TEMPERATURE

-20°C to +45°C

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE

110VAC 60Hz, 277VAC 50Hz

DIMMABLE

Optional

LIFESPAN

50,000 hours (to L70 B10)

POWER

25W, 40W, 60W, 65W

BEAM ANGLE

120°

CRI


>80

CCT

5,000-6,000K Cool White
3,800-4,500K Natural White
2,800-3,500K Warm White

580mm Diameter option also available as Up/Down in 40W & 60W. Contact Empyrean for more details.

SCHEMATIC OF CORONA-580C-W40W

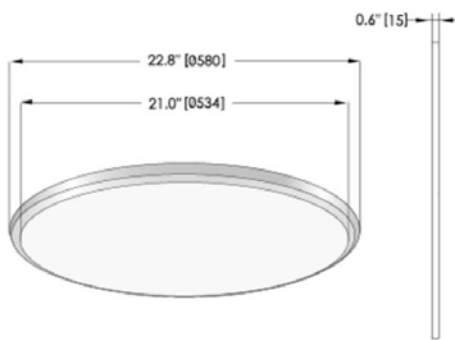

OUTPUT

	Cool White	Natural White	Warm White
25W	2,600 lm	2,500 lm	2,300 lm
40W	3,600 lm	3,400 lm	3,200 lm
60W	5,220 lm	5,000 lm	4,800 lm
65W	6,100 lm	6,000 lm	5,900 lm

WALL/CEILING MOUNT



SUSPENSION MOUNT



PRODUCT CODE BUILDER

E.G. Corona-580C-W-NW plus Corona-Driver-Dim-40W

PRODUCT	DIAMETER	TRIM	POWER	CCT
Corona	- 380C (380)	-W (White)	- 25W	CW (Cool White)
	- 580C (580)		- 40W	NW (Natural White)
			- 60W	WW (Warm White)
	- 980C (980)		- 65W	

DRIVER & POWER OPTIONS

- DriverFF (NonDim) 25W, 40W, 60W, 65W
- Driver-Dim (0-10V) 25W, 40W, 60W, 65W
- Driver-DALI 25W, 40W, 60W