

Corona™ Circular

SMALL PANEL LIGHTS




PRODUCT INFORMATION

MEASUREMENTS	LENGTH	DEPTH
CUTOUT	145 / 180 / 240mm	12mm
LIGHT SOURCE	125 / 160 / 220mm	
LENS	Epistar LED	
HOUSING	Frosted PC or Prismatic	
MOUNTING	Aluminium alloy	
TRIM	Recessed (with 2 x spring clips)	
OPERATING TEMPERATURE	White	
	-20°C to +45°C	

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE	110VAC 60Hz, 230VAC 50Hz
DIMMABLE	0-10V/PWM, DALI or Tridonic
LIFESPAN	50,000 hours (to L70 B10)
POWER	8W, 15W, 24W
BEAM ANGLE	120°
CRI	>75
CCT	5,700K Cool White 4,000K Natural White 3,000K Warm White

SCHEMATIC OF CORONA-145C

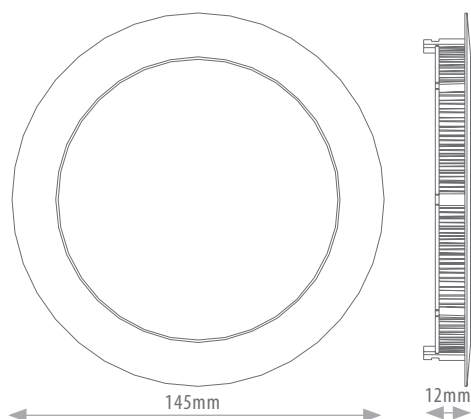

OUTPUT

	Cool White	Natural White	Warm White
8W	650 lm	600 lm	450 lm
15W	1,300 lm	1,200 lm	1,000 lm
24W	2,200 lm	2,000 lm	1,800 lm

PRODUCT CODE BUILDER

E.G. Corona-240C-W-NW plus Corona-DriverFF-24W-ND

PRODUCT RANGE	DIAMETER (MM)	LENS	POWER	CCT
Corona	- 145C (145)	"Blank" (Frosted)	- 8W	CW (Cool White)
	- 180C (180)	P (Prismatic)	- 15W	NW (Natural White)
	- 240C (240)		- 24W	WW (Warm White)

DRIVER & POWER OPTIONS

DriverFF (NonDim) 8W, 15W, 24W
 Driver-Dim (0-10V) 8W, 15W, 24W
 Driver-DALI 12W, 25W