

Corona™ Rectangular

ULTRA SLIM PANEL LIGHTS



PRODUCT INFORMATION


MEASUREMENTS	LENGTH	WIDTH	DEPTH
	595/ 1,195mm	295/ 595mm	8mm
LIGHT SOURCE	LumenMax/Epistar LED		
LENS	Frosted PC or Prismatic		
HOUSING	Aluminium alloy		
MOUNTING	Default - mount in T-Bar ceiling grid Recessed with Plaster Frame Kit, Suspended, Hard Surface, Box Frame.		
TRIM	White		
OPERATING TEMPERATURE	-20°C to +45°C		

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE	110VAC 60Hz, 230VAC 50Hz
DIMMABLE	0-10V/PWM, DALI or Tridonic
LIFESPAN	50,000 hours (to L70 B10)
POWER	26W, 40W, 70W
UGR	19
BEAM ANGLE	120°
CRI	>80
CCT	5,700K Cool White 4,000K Natural White 3,000K Warm White



BEAM ANGLE = 120°

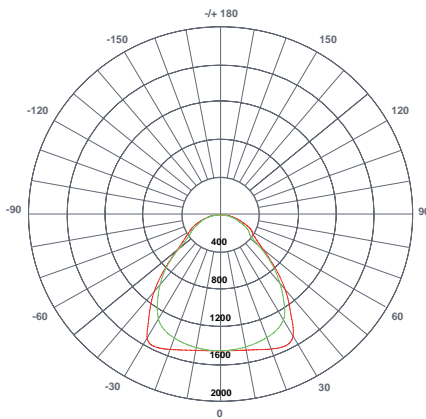

Unit: cd
c0/180 : PRISMATIC
c90/270 : STANDARD

OUTPUT

	Cool White	Natural White	Warm White
26W	2,500 lm	2,300 lm	2,100 lm
40W	4,200 lm	4,000 lm	3,800 lm
70W	5,900 lm	5,700 lm	5,500 lm

SCHEMATIC OF CORONA-1200RS



PRODUCT CODE BUILDER

E.G. Corona-1200RS-W-NW plus Corona-DriverFF-26W-ND

PRODUCT	LENGTH	WIDTH	LENS	TRIM	POWER	CCT
Corona	- 600	RS(300)	"Blank" (Frosted) - W (White)		26W	CW (Cool White)
	- 1200	RS(300)	P (Prismatic)		26W	NW (Natural White)
					40W	WW (Warm White)
					70W	
		R6S(600)			40W	
					70W	

DRIVER & POWER OPTIONS

- DriverFF (NonDim) 26W, 40W, 70W
- Driver-Dim (0-10V) 26W, 40W, 70W
- Driver-DALI 25W, 40W, 60W