


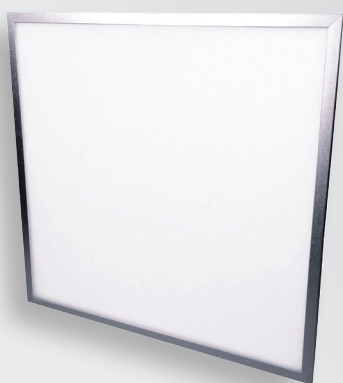

PRODUCT INFORMATION

MEASUREMENTS

LIGHT SOURCE

LENS

HOUSING

MOUNTING

TRIM

LENGTH 295mm
WIDTH 295mm
DEPTH 12mm

LumenMax/Epistar LED

Frosted PC or Prismatic

Aluminium alloy

Default - mount in T-Bar ceiling grid
Wall/Ceiling Mount, Recessed with Frame Kit,
Suspended, Hard Surface, Box Frame.

White or Silver

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE

DIMMABLE

LIFESPAN

POWER

UGR


BEAM ANGLE

CRI

CCT

110VAC 60Hz, 230VAV 50Hz
0-10V/PWM, DALI or Tridonic
50,000 hours
20W
19
120°
>80 (Warm & Natural)
6,000-7,000K Cool White
3,800-4,500K Natural White
2,800-3,500K Warm White

SCHEMATIC OF CORONA-300S

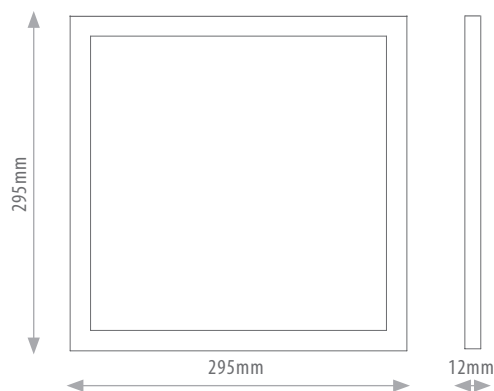

OUTPUT

	Cool White	Natural White	Warm White
20W	1,460 lm	1,300 lm	1,120 lm

PRODUCT CODE BUILDER

E.G. CORONA-300S-W20WN-D

PRODUCT RANGE	LENGTH (MM)	LENS	TRIM	POWER	CCT	DIMMING	MOUNTING CODE BUILDER	
Corona	- 300S	P (Prismatic)	- W (White) - S (Silver)	20W	C (Cool White) N (Natural White) W (Warm White)	- ND (None) - D (0-10V/PWM) - DD (DALI) - TD (Tridonic DALI)	Corona-Mount	- W (Wall/Ceiling) - R (Recessed Frame) - S (Suspended) - H (Hard Surface) - B (Box Frame)