

# Corona<sup>TM</sup> Square

ULTRA SLIM PANEL LIGHTS




## PRODUCT INFORMATION

<b>MEASUREMENTS</b>	LENGTH	WIDTH	DEPTH
	595mm	595mm	8mm
<b>LIGHT SOURCE</b>	LumenMax/Epistar		
<b>LENS</b>	Frosted PC or Prismatic		
<b>HOUSING</b>	Aluminium alloy		
<b>MOUNTING</b>	Default - mount in T-Bar ceiling grid Recessed with Plaster Frame Kit, Suspended, Hard Surface, Box Frame.		
<b>TRIM</b>	White		
<b>OPERATING TEMPERATURE</b>	-20°C to +45°C		

## TECHNICAL SPECIFICATIONS

<b>INPUT VOLTAGE</b>	110VAC 60Hz, 230VAV 50Hz
<b>DIMMABLE</b>	0-10V/PWM, DALI or Tridonic
<b>LIFESPAN</b>	50,000 hours (to L70 B10)
<b>POWER</b>	30W, 40W, 50W
<b>UGR</b>	19
<b>BEAM ANGLE</b>	120°
<b>CRI</b>	>80
<b>CCT</b>	5,700K Cool White 4,000K Natural White 3,000K Warm White

### BEAM ANGLE = 120°

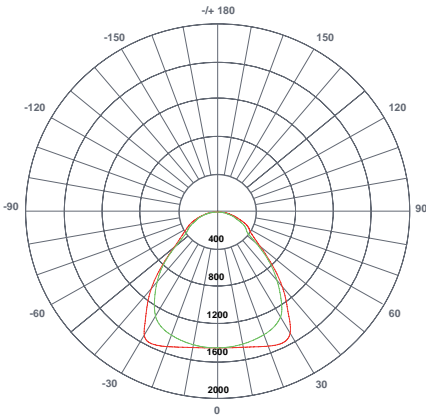


Unit: cd  
c0/180 : PRISMATIC  
c90/270 : STANDARD

### OUTPUT

	Cool White	Natural White	Warm White
30W	3,700 lm	3,500 lm	3,200 lm
40W	4,000 lm	3,800 lm	3,600 lm
50W	4,900 lm	4,700 lm	4,500 lm

### SCHEMATIC OF CORONA-600SS

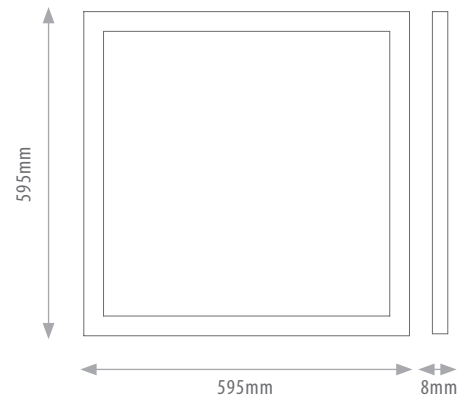

### PRODUCT CODE BUILDER

E.G. Corona-600SS-W-NW plus Corona-DriverFF-40W-ND

PRODUCT	LENGTH	LENS	TRIM	POWER	CCT
Corona	- 600SS	"Blank" (Frosted) P (Prismatic)	- W (White)	30W 40W 50W	CW (Cool White) NW (Natural White) WW (Warm White)

### DRIVER & POWER OPTIONS

- DriverFF (NonDim) 30W, 40W, 50W
- Driver-Dim (0-10V) 30W, 40W, 50W
- Driver-DALI 25W, 40W, 60W