


# Corona™ Up / Down

## RECTANGULAR PANEL LIGHTS

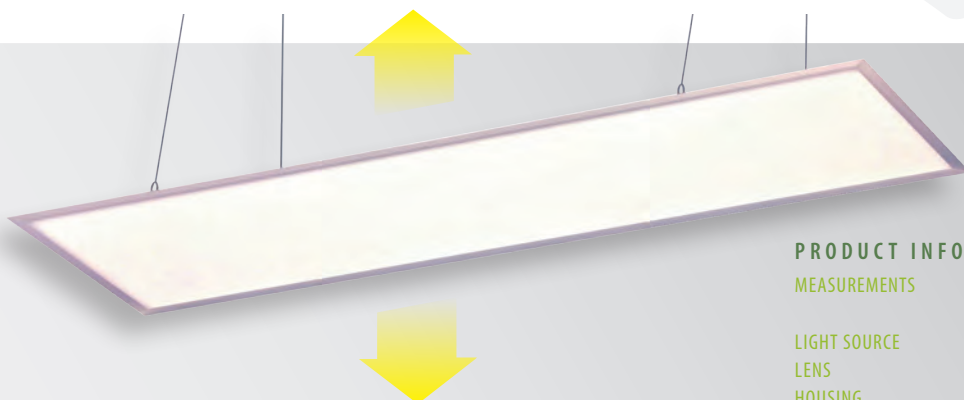

### UP/DOWN PANEL

26W or 40W panel with frosted backing which emits ~30% of total lumens upwards.

### PRODUCT INFORMATION

MEASUREMENTS	LENGTH	WIDTH	DEPTH
	1,195mm	295mm	12mm
LIGHT SOURCE	Epistar		
LENS	Frosted PC or Prismatic (Down Only)		
HOUSING	Aluminium alloy		
MOUNTING	Suspended		
TRIM	White		
OPERATING TEMPERATURE	-20°C to +45°C		

### TECHNICAL SPECIFICATIONS

INPUT VOLTAGE	110VAC 60Hz, 230VAC 50Hz
DIMMABLE	0-10V/PWM, DALI or Tridonic
LIFESPAN	50,000 hours (to L70 B10)
POWER	26W, 40W
UGR	19
BEAM ANGLE	120°
CRI	>80
CCT	5,700K Cool White 4,000K Natural White 3,000K Warm White

### SCHEMATIC OF CORONA-U1200R



### OUTPUT

	Cool White	Natural White	Warm White
26W	U: 715 lm D: 1,620 lm	U: 650 lm D: 1,560 lm	U: 620 lm D: 1,430 lm
40W	U: 1,100 lm D: 2,500 lm	U: 1,000 lm D: 2,400 lm	U: 950 lm D: 2,250 lm

### PRODUCT CODE BUILDER

E.G. Corona-U1200RS-W-NW plus Corona-Driver-DALI-40W

PRODUCT RANGE	TYPE	LENGTH (MM)	LENS	TRIM	POWER	CCT	MOUNTING
Corona	- U (Up/Down)	1200R (1200)	P (Prismatic)	- W (White)	26W 40W	CW (Cool White) NW (Natural White) WW (Warm White)	- S (Suspended)

### DRIVER & POWER OPTIONS

- DriverFF (NonDim) 26W, 40W
- Driver-Dim (0-10V) 26W, 40W
- Driver-DALI 25W, 40W