



PRODUCT INFORMATION


MEASUREMENTS	LENGTH	WIDTH	DEPTH
	595mm	595mm	8mm
LENS	Frosted PC or Prismatic		
HOUSING	Aluminium alloy		
MOUNTING	Default - mount in T-Bar ceiling grid Recessed with Plaster Frame Kit, Suspended, Hard Surface, Box Frame.		
TRIM	White		

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE	110VAC 60Hz, 240VAV 50Hz
DIMMABLE	0-10V/PWM, DALI or Tridonic
LIFESPAN	50,000 hours (to L70 B10)
POWER	30W, 40W, 50W
BEAM ANGLE	120°
CRI	95
CCT	~3,970K Natural White
COI*	1.0


*CYANOSIS OBSERVATION INDEX (NATA LABORATORY CERTIFIED TO AS/NZS 1680.2.5:1997)

BEAM ANGLE = 120°

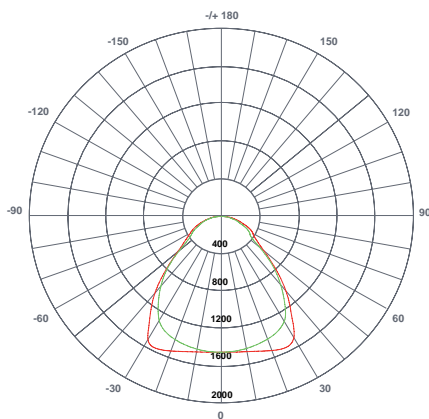

Unit: cd
 c0/180 : PRISMATIC
 c90/270 : STANDARD

SCHEMATIC OF CORONA-600SS

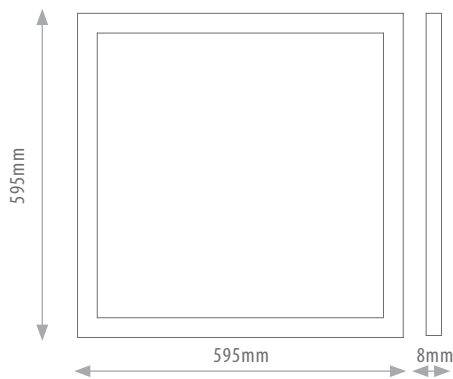

PRODUCT CODE BUILDER

E.G. Corona-600SS-CYW-NW plus Corona-DriverFF-50W-ND

PRODUCT RANGE	LENGTH (MM)	LENS	CYANOSIS	TRIM	POWER	CCT
Corona	- 600SS	"Blank" (Frosted) P (Prismatic)	- CY	W (White)	30W 40W 50W	NW (Natural White)

DRIVER & POWER OPTIONS

- DriverFF (NonDim) 30W, 40W, 50W
- Driver-Dim (0-10V) 30W, 40W, 50W
- Driver-DALI 25W, 40W, 60W