



PRODUCT INFORMATION



DIMENSIONS

	Diameter (D)	Depth (H)	Inner Disc (M)
12W	280mm	42mm	163mm
18W	360mm	46mm	212mm
24W	420mm	46mm	212mm

WEIGHT

1.05 - 1.25kg

HOUSING

Aluminium with Frosted PC

INNER DISC COLOUR

Silver, White, Black, Red or Orange

IP RATING

IP44

OPERATING TEMPERATURE

-20°C to + 45°C

MOUNTING

Wall/Ceiling Mount or Suspended

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE

90-264V and 50/60Hz

DIMMABLE OPTIONAL

Optional

LIFESPAN

50,000 hours

POWER

12W, 18W, 24W

BEAM ANGLE

360° Up & Down

POWER FACTOR

>0.95


CRI

>80

CCT

~5,700K Cool White
~4,000K Natural White
~3,000K Warm White

SCHEMATIC OF CYLLENE HALO

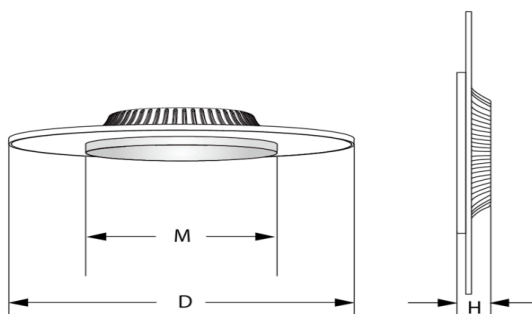

OUTPUT

		12W	18W	24W
COOL WHITE	Efficacy	110 lm/W	110 lm/W	110 lm/W
	Luminous Flux	1,320 lm	1,980 lm	2,640 lm
NATURAL WHITE	Efficacy	100 lm/W	100 lm/W	100 lm/W
	Luminous Flux	1,200lm	1,800 lm	2,400 lm
WARM WHITE	Efficacy	90 lm/W	90 lm/W	90 lm/W
	Luminous Flux	1,080 lm	1,620 lm	2,160 lm

PRODUCT CODE BUILDER

E.G. CYLLENE-H18WN-S-ND-W

PRODUCT CODE	POWER (W)	CCT	COVER COLOUR	DIMMING	MOUNTING
CYLLENE-H	12W	C (Cool White)	-S (Silver)	-ND (Non-Dimmable)	-W (Wall/Ceiling Mount)
	18W	N (Natural White)	-W (White)	-D (Dimmable)	-S (Suspended)
	24W	W (Warm White)	-B (Black)	-DD (DALI Dimmable)	
			-R (Red)	-TD (Tridonic Dimmable)	
			-O (Orange)		