

Andromeda™ C LinearP

CERAMIC LED POULTRY LIGHTING

LED ⚡ 🔧 IP66 >80 L70 0.95 ♻️
 HIGH POWER 90-305VAC SHOCKRESISTANT RATING CRI 50,000 HRS POWER FACTOR & 24-48v DC



PRODUCT INFORMATION


LIGHT SOURCE	High Power - Full Spectrum LED Chips
HOUSING	ADC12 Aluminium (Marine Grade) Ceramic Diode Seat with Polycarbonate Pixel Rails
BRACKET MATERIAL	SGCC
BRACKET TYPE	Wall Mount, Surface Mount or Hook Mount
FRAME COLOUR	Silver RAL 9006
MECHANICAL IMPACT RESISTANCE	IK10
IP RATING	IP66
OPERATING TEMP	-40°C to 55°C

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE	90-305VAC, 50/60Hz (Standard) 24-48v DC
DIMMABLE	0-10v Dimmable
LIFESPAN	125,000 hours to L70
POWER	20W, 40W & 60W
POWER FACTOR	0.95
BEAM ANGLE	150°
LUMINOUS EFFICACY	100 lm/W Post Optics
CCT	Full Spectrum 4,000K
(CRI)	>80 Standard

*Please enquire directly to Emyprean for more information on MOQ's.

SCHEMATIC OF CERAMIC LINEAR P (60W)

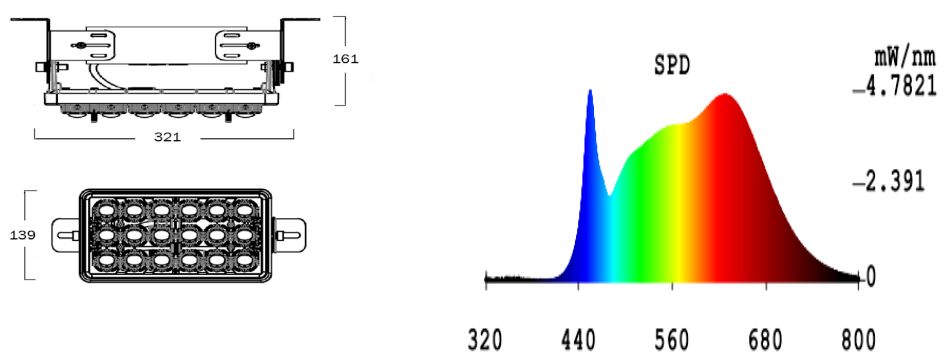

TYPICAL APPLICATIONS



PRODUCT CODE	POWER	OUTPUT* (LUMENS)	INPUT CURRENT (mA)	LENGTH (MM)	WIDTH (MM)	DEPTH (MM)	WEIGHT (KG)
Andromeda-C-LinearP-20	20W	2,000	760mA	261	139	153	1.8kg
Andromeda-C-LinearP-40	40W	4,000	760mA	261	139	153	1.9kg
Andromeda-C-LinearP-60	60W	6,000	700mA	321	139	161	2.0kg