



580C



380C

### PRODUCT INFORMATION



#### MEASUREMENTS

DIAMETER: 380 / 580 / 980mm  
DEPTH: 13.5 / 15mm

#### LIGHT SOURCE

Epistar LED

#### LENS

Frosted PC

#### HOUSING

Aluminium alloy

#### MOUNTING

Wall/Ceiling Mount or Suspension

#### TRIM

White

#### OPERATING TEMPERATURE

-20°C to +45°C

### TECHNICAL SPECIFICATIONS

#### INPUT VOLTAGE

110VAC 60Hz, 277VAC 50Hz

#### DIMMABLE

Optional

#### LIFESPAN

50,000 hours

#### POWER

25W, 40W, 60W, 65W

#### BEAM ANGLE

120°

#### CRI


>80

#### CCT

5,000-6,000K Cool White  
3,800-4,500K Natural White  
2,800-3,500K Warm White

580mm Diameter option also available as Up/Down in 40W & 60W. Contact Empyrean for more details.

### SCHEMATIC OF CORONA-580C-W40W

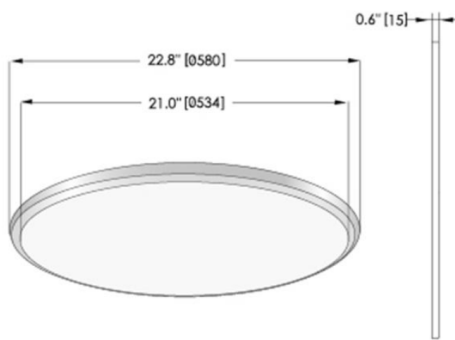


### OUTPUT

	Cool White	Natural White	Warm White
25W	2,600 lm	2,500 lm	2,300 lm
40W	3,600 lm	3,400 lm	3,200 lm
60W	5,220 lm	5,000 lm	4,800 lm
65W	6,100 lm	6,000 lm	5,900 lm

### WALL/CEILING MOUNT



### SUSPENSION MOUNT



### PRODUCT CODE BUILDER

E.G. CORONA-580C-W40WN-ND

PRODUCT	DIAMETER	TRIM	POWER	CCT	DIMMING
Corona	- 380C (380)	-W (White)	- 25W	C (Cool White)	- ND (None)
	- 580C (580)		- 40W	N (Natural White)	- D (0-10V/PWM)
			- 60W	W (Warm White)	- DD (Dali)
	- 980C (980)		- 65W		- TD (Tridionid DALI)