




PRODUCT INFORMATION

MEASUREMENTS	LENGTH	DEPTH
	145 / 180 / 240mm	12mm
CUTOUT	125 / 160 / 220mm	
LIGHT SOURCE	Epistar LED	
LENS	Frosted PC or Prismatic	
HOUSING	Aluminium alloy	
MOUNTING	Recessed (with 2 x spring clips)	
TRIM	White	
OPERATING TEMPERATURE	-20°C to +45°C	

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE	110VAC 60Hz, 230VAC 50Hz
DIMMABLE	0-10V/PWM, DALI or Tridonic
LIFESPAN	50,000 hours
POWER	8W, 15W, 24W
BEAM ANGLE	120°
CRI	>75
CCT	5,700K Cool White 4,000K Natural White 3,000K Warm White

SCHEMATIC OF CORONA-145C

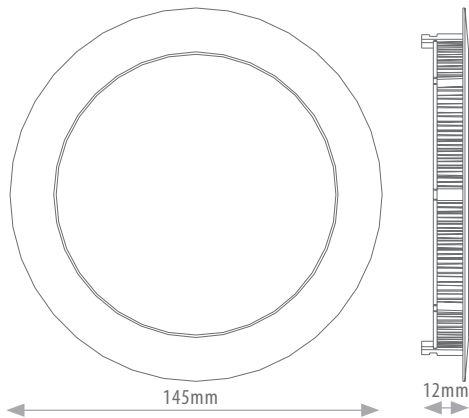

OUTPUT

	Cool White	Natural White	Warm White
8W	650 lm	600 lm	450 lm
15W	1,300 lm	1,200 lm	1,000 lm
24W	2,200 lm	2,000 lm	1,800 lm

PRODUCT CODE BUILDER

E.G. CORONA-240C-24WN-D

PRODUCT RANGE	DIAMETER (MM)	LENS	POWER	CCT	DIMMING
Corona	- 145C (145)	P (Prismatic)	- 8W	C (Cool White)	- ND (None)
	- 180C (180)		- 15W	N (Natural White)	- D (0-10V/PWM)
	- 240C (240)		- 24W	W (Warm White)	- DD (DALI)
					- TD (Tridonic DALI)