

# Corona™ Rectangular

ULTRA SLIM PANEL LIGHT UGR 16




## PRODUCT INFORMATION

<b>MEASUREMENTS</b>	LENGTH	WIDTH	DEPTH
<b>WEIGHT</b>	1,195	295	9mm
<b>LIGHT SOURCE</b>	JuFei Optoelectronic		
<b>LENS</b>	Prismatic		
<b>HOUSING</b>	Aluminium alloy		
<b>MOUNTING</b>	Default - mount in T-Bar ceiling grid Recessed with Plaster Frame Kit, Suspended, Hard Surface, Box Frame.		
<b>TRIM</b>	White		
<b>OPERATING TEMPERATURE</b>	-20°C to +45°C		

## TECHNICAL SPECIFICATIONS

<b>INPUT VOLTAGE</b>	110VAC 60Hz, 230VAC 50Hz
<b>DIMMABLE</b>	0-10V/PWM, DALI or Tridonic
<b>LIFESPAN</b>	50,000 hours
<b>POWER</b>	26W
<b>UGR</b>	16
<b>BEAM ANGLE</b>	120°
<b>CRI</b>	>80
<b>CCT</b>	4,000K Natural White

### BEAM ANGLE = 120°

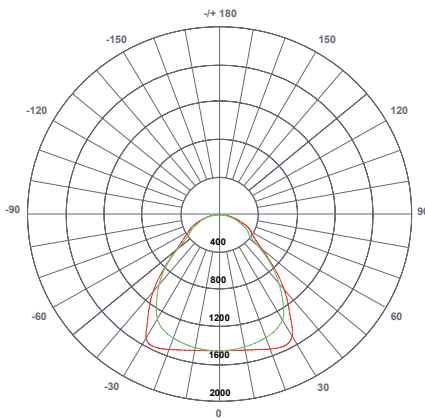

Unit: cd  
c0/180 : PRISMATIC  
c90/270 : STANDARD

## OUTPUT

	Natural
	White
26W	2,695 lm

## SCHEMATIC OF CORONA-1200RS



## PRODUCT CODE BUILDER

E.G. CORONA-1200RSP+-W26WN-ND

PRODUCT RANGE	LENGTH (MM)	WIDTH (MM)	LENS	UGR16	TRIM	POWER	CCT	DIMMING
Corona	- 1200	RS(300)	P (Prismatic)	+	- W (White)	26W	N (Natural White)	- ND (None) - D (0-10V/PWM) - DD (DALI) - TD (Tridonic DALI)