

# Corona™ Rectangular

ULTRA SLIM PANEL LIGHTS



## PRODUCT INFORMATION

### MEASUREMENTS

LENGTH 595/  
1,195mm    WIDTH 295/  
595mm    DEPTH 8mm

### LIGHT SOURCE

LumenMax/Epistar LED

### LENS

Frosted PC or Prismatic

### HOUSING

Aluminium alloy

### MOUNTING

Default - mount in T-Bar ceiling grid  
Recessed with Plaster Frame Kit,  
Suspended, Hard Surface, Box Frame.

### TRIM

White

### OPERATING TEMPERATURE

-20°C to +45°C

## TECHNICAL SPECIFICATIONS

### INPUT VOLTAGE

110VAC 60Hz, 230VAC 50Hz

### DIMMABLE

0-10V/PWM, DALI or Tridonic

### LIFESPAN

50,000 hours

### POWER

26W, 40W, 70W

### UGR

19

### BEAM ANGLE

120°

### CRI


>80

### CCT

5,700K Cool White  
4,000K Natural White  
3,000K Warm White



## BEAM ANGLE = 120°

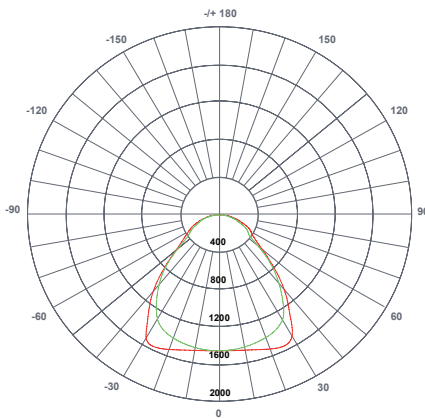

Unit: cd

c0/180 : PRISMATIC

c90/270 : STANDARD

## OUTPUT

	Cool White	Natural White	Warm White
26W	2,500 lm	2,300 lm	2,100 lm
40W	4,200 lm	4,000 lm	3,800 lm
70W	5,900 lm	5,700 lm	5,500 lm

## SCHEMATIC OF CORONA-1200RS



## PRODUCT CODE BUILDER

E.G. CORONA-1200RS-W40WN-D

PRODUCT RANGE	LENGTH (MM)	WIDTH (MM)	LENS	TRIM	POWER	CCT	DIMMING
Corona	- 600	RS(300)	P (Prismatic)	- W (White)	26W	C (Cool White)	- ND (None)
		RS(300)			26W	N (Natural White)	- D (0-10V/PWM)
	- 1200	RS(300)	40W	W (Warm White)	- DD (DALI)		
			70W	- TD (Tridonic DALI)			
		----- R6S(600)	40W				
			70W				