

CoronaTM Square

ULTRA SLIM PANEL LIGHTS



PRODUCT INFORMATION

MEASUREMENTS

LENGTH	WIDTH	DEPTH
295 / 595mm	295 / 595mm	10 / 8mm

LIGHT SOURCE

LumenMax/Epistar

LENS

Frosted PC or Prismatic

HOUSING

Aluminium alloy

MOUNTING

Default - mount in T-Bar ceiling grid
Recessed with Plaster Frame Kit,
Suspended, Hard Surface, Box Frame.

TRIM

White

OPERATING TEMPERATURE

-20°C to +45°C

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE

110VAC 60Hz, 230VAV 50Hz

DIMMABLE

0-10V/PWM, DALI or Tridonic

LIFESPAN

50,000 hours

POWER

20W, 30W, 40W, 50W

UGR

19

BEAM ANGLE

120°


CRI

>80

CCT


5,700K Cool White
4,000K Natural White
3,000K Warm White

BEAM ANGLE = 120°

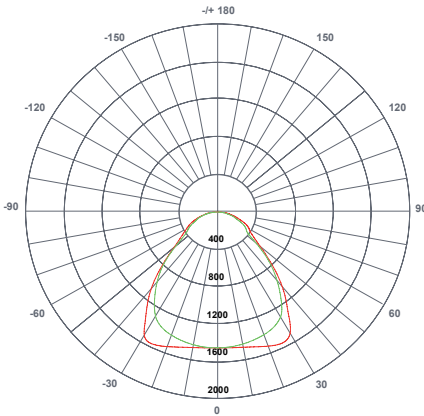


Unit: cd
c0/180 : PRISMATIC
c90/270 : STANDARD

SCHEMATIC OF CORONA-600SS

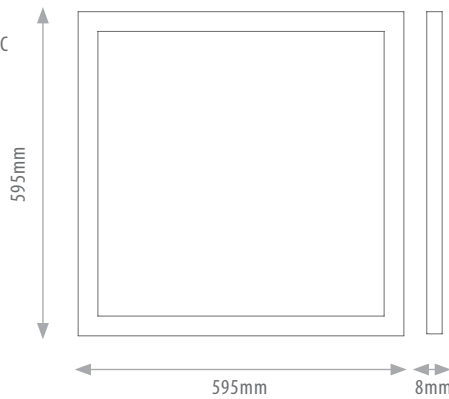

SCHEMATIC OF CORONA-300S

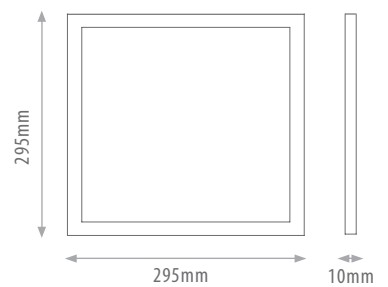

PRODUCT CODE BUILDER

E.G. CORONA-600SS-W40WN-D

PRODUCT RANGE	LENGTH (MM)	LENS	TRIM	POWER	CCT	DIMMING
Corona	- 300S - 600SS	P (Prismatic)	- W (White)	20W 30W 40W 50W	C (Cool White) N (Natural White) W (Warm White)	- ND (None) - D (0-10V/PWM) - DD (DALI) - TD (Tridonic DALI)

OUTPUT

	Cool White	Natural White	Warm White
20W	1,700 lm	1,500 lm	1,300 lm
30W	3,700 lm	3,500 lm	3,200 lm
40W	4,000 lm	3,800 lm	3,600 lm
50W	4,900 lm	4,700 lm	4,500 lm