


Corona™ Up / Down

RECTANGULAR PANEL LIGHTS

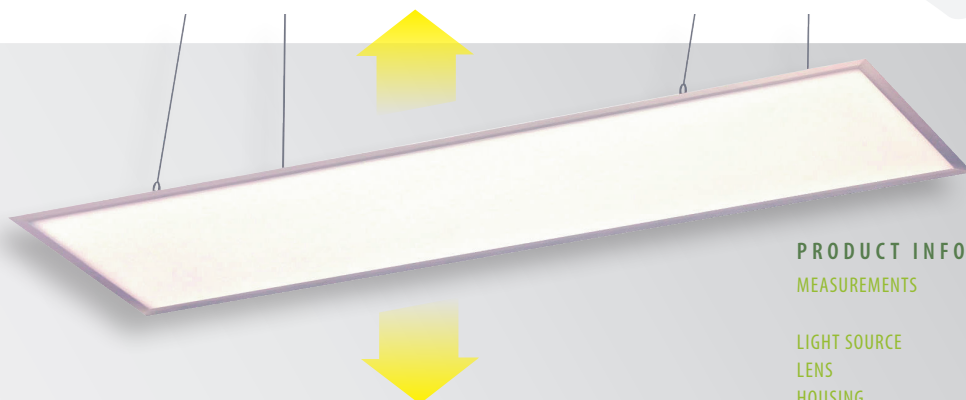

UP/DOWN PANEL

26W or 40W panel with frosted backing which emits ~30% of total lumens upwards.

PRODUCT INFORMATION

MEASUREMENTS	LENGTH	WIDTH	DEPTH
	1,195mm	295mm	12mm
LIGHT SOURCE	Epistar		
LENS	Frosted PC or Prismatic (Down Only)		
HOUSING	Aluminium alloy		
MOUNTING	Suspended		
TRIM	White		
OPERATING TEMPERATURE	-20°C to +45°C		

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE	110VAC 60Hz, 230VAC 50Hz
DIMMABLE	0-10V/PWM, DALI or Tridonic
LIFESPAN	50,000 hours
POWER	26W, 40W
UGR	19
BEAM ANGLE	120°
CRI	>80
CCT	5,700K Cool White 4,000K Natural White 3,000K Warm White

SCHEMATIC OF CORONA-U1200R



OUTPUT

	Cool White	Natural White	Warm White
26W	U: 715 lm D: 1,620 lm	U: 650 lm D: 1,560 lm	U: 620 lm D: 1,430 lm
40W	U: 1,100 lm D: 2,500 lm	U: 1,000 lm D: 2,400 lm	U: 950 lm D: 2,250 lm

PRODUCT CODE BUILDER

E.G. CORONA-U1200R-W40WN-D-S

PRODUCT RANGE	TYPE	LENGTH (MM)	LENS	TRIM	POWER	CCT	DIMMING	MOUNTING
Corona	- U (Up/Down)	1200R (1200)	P (Prismatic)	- W (White)	26W 40W	C (Cool White) N (Natural White) W (Warm White)	- ND (None) - D (0-10V/PWM) - DD (DALI) - TD (Tridonic DALI)	- S (Suspended)