

Cyllene™ EXTERNAL OYSTER

WATER PROOF EXTERNAL LED LUMINAIRE



PRODUCT INFORMATION



DIMENSIONS

	Length	Width	Height
SQUARE	315mm	-	99mm
CIRCULAR	315mm	315mm	99mm

HOUSING

VARIATIONS

FRAME COLOUR

IP RATING

MOUNTING

Frosted Plastic with Mounting Base
Circular (standard) or Square
Silver
IP65
Surface Mount

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE

90-264VAC, 50/60Hz

DIMMABLE OPTIONAL

Optional

LIFESPAN

50,000 hours

POWER

18W, 24W


BEAM ANGLE

180°

CCT

~5,000K Cool White >65 (CRI)
~4,000K Natural White >75 (CRI) Standard
~3,000K Warm White >80 (CRI)

SCHEMATIC OF CIRCULAR EXTERNAL OYSTER

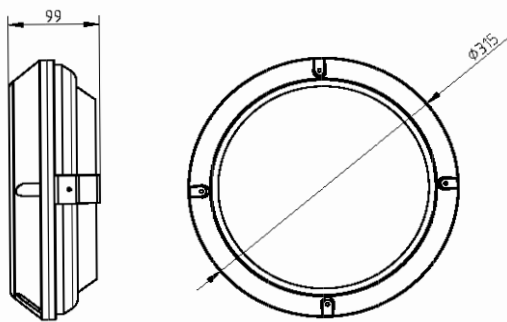

OUTPUT

		18W	24W
COOL WHITE	Efficacy	95 lm/W	95 lm/W
	Luminous Flux	1,710 lm	2,280 lm
NATURAL WHITE	Efficacy	92 lm/W	92 lm/W
	Luminous Flux	1,655 lm	2,200 lm
WARM WHITE	Efficacy	85 lm/W	85 lm/W
	Luminous Flux	1,530 lm	2,040 lm

PRODUCT CODE BUILDER

E.G. CYLLENE-EXT-S18W-N180-ND

PRODUCT CODE	TYPE	POWER (W)	CCT	BEAM ANGLE	DIMMABLE
CYLLENE-EXT	-SQ	-S18W	-C (Cool White)	180	-ND (Non-Dimmable)
		-S24W	-N (Natural White)		-D (Dimmable)
			-W (Warm White)		-TD (Tridonic Dimmable)