

Cyllene™ HALO DIRECT

DECORATIVE SUSPENDED LED LUMINAIRE



PRODUCT INFORMATION



DIMENSIONS

	Diameter	Depth	Inner Disc
26W/36W	380mm	88mm	221mm

WEIGHT

2.5kg

HOUSING

Aluminium with Frosted PC

INNER COLOUR

Silver, White, Red or Black

IP RATING

IP20

OPERATING TEMPERATURE

-20°C to + 60°C

MOUNTING

Suspended

TECHNICAL SPECIFICATIONS

INPUT VOLTAGE

90-264V and 50/60Hz

DIMMABLE OPTIONAL

Optional

LIFESPAN

50,000 hours

POWER

26W, 36W

BEAM ANGLE

360° Up & Down

POWER FACTOR

>0.95

CRI

>80


CCT

~5,700K Cool White

~4,000K Natural White

~3,000K Warm White

SCHEMATIC OF CYLLENE HALO DIRECT

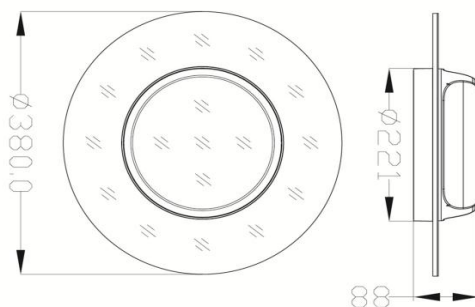

OUTPUT

		26W	36W
COOL WHITE	Efficacy	100 lm/W	96 lm/W
	Luminous Flux	2,600 lm	3,450 lm
NATURAL WHITE	Efficacy	92 lm/W	90 lm/W
	Luminous Flux	2,400 lm	3,250 lm
WARM WHITE	Efficacy	85 lm/W	85 lm/W
	Luminous Flux	2,200 lm	3,050 lm

PRODUCT CODE BUILDER

E.G. CYLLENE-HD26WN-S-ND

PRODUCT CODE	POWER (W)	CCT	INNER COLOUR	DIMMING
CYLLENE-HD	-26W	C (Cool White)	-S (Silver)	-ND (Non-Dimmable)
	-36W	N (Natural White)	-W (White)	-D (Dimmable)
		W (Warm White)	-B (Black)	-DD (DALI Dimmable)
			-R (Red)	-TD (Tridonic Dimmable)