

# Nebula™ Multi

VERSATILE LED LUMINAIRE



## PRODUCT INFORMATION

### MEASUREMENTS

	Length	Width	Depth	Weight
20W	209mm	152mm	129mm	3.5kg
40W	209mm	152mm	129mm	4.5kg

### LIGHT SOURCE

Nichia High Power LED

### HOUSING

Aluminium alloy and adjustable mounting bracket

### BRACKET MATERIAL

ST12

### MOUNTING

Standard bracket for wall/ceiling mount

### FRAME COLOUR

Silver

### IP RATING

IP66

### OPERATING TEMP

-40°C to 55°C

## TECHNICAL SPECIFICATIONS

### INPUT VOLTAGE

85-277VAC, 50/60Hz or 24VDC

### DIMMABLE OPTIONAL

5-100%, RGB with DMX 512

### LIFESPAN

50,000 hours

### EFFICACY

100lm/W

### POWER

20W, 40W

### BEAM ANGLE

10°, 40°, 40° Elongated


### CCT

5,000-5,500K Cool White\*

4,000-4,500K Natural White

2,700-3,000K Warm White RGB

## SCHEMATIC OF MULTI 20W

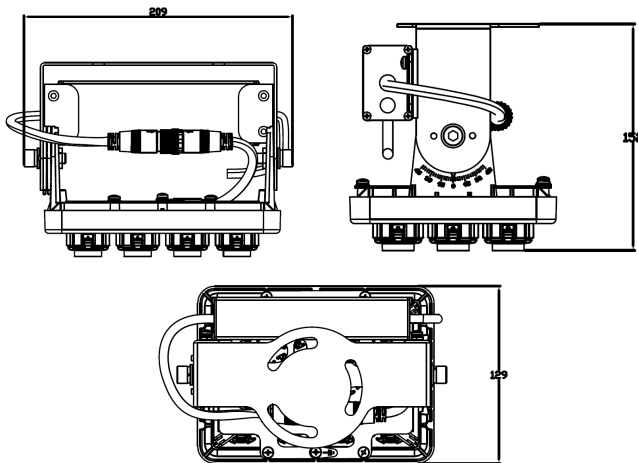

## PRODUCT CODE BUILDER

E.G. NEBULA-M40W-40CW-S

PRODUCT CODE	POWER	BEAM ANGLE	CCT	TRIM	DIMMING
NEBULA-M	20W	-10	-WW (Warm White)	-S (Silver)	-DD (DALI)
	40W	-40	-NW (Natural White)		-D (0-10V)
		-40E	-CW (Cool White)		-P (PWM)
			-RGB		

## TYPICAL APPLICATIONS

